

# SG 1500H (12V150AH/C<sub>20</sub>)

Power Solar Gel Premium Battery



## Solar Gel Deep Cycle



\*\*\* The color and the printed specifications of the products are subject to change without prior notice.

### Solar gel PP Series

NEWMAX Solar gel batteries are true maintenance-free sealed batteries engineered specially to satisfy the need for frequent deep cycles from PVs and renewable energy storage applications. We are confident that our technology-intensive, long-lasting, and environment friendly SG batteries will provide stability and efficiency for your everyday renewable energy needs.

#### General feature

❖ Plate	Paste type
❖ Battery type	Sealed and Maintenance free operation / Non-spillable construction design
❖ Case/cover material	High-stiffness engineering plastic PP (Heat Deflection Temp. 140°C) RoHS Compliant EU Directive 2002/95/EC
❖ Safety performance	Safety valve & flame arrestor installation for explosion proof.
❖ High quality, high reliability and low self discharge rate / Exceptional deep discharge recovery performance	
❖ Flexibility design for multiple install positions (Position Free, GEL Technology)	
❖ Designed in accordance with and published in compliance with applicable IEC and BS EN, KS standards	

- IEC 60896-21/22 Stationary lead-acid batteries – Valve regulated types
- BS EN 61427 Secondary cells and batteries for photovoltaic energy systems (PVES)
- KS C 8518 Stationary sealed lead-acid batteries – Valve regulated types


**01 Long Life**      **02 Maintenance Free**      **03 Leak free**      **04 Safety**

High density, anti-corrosive lead calcium alloy is used in harmony with the GEL electrolyte to reduce the sulfation effect significantly.


NEWMAX Battery has a gas re-combining design that doesn't need maintenance until the end of its life.

Gel Technology is applied to prevent leakage. They won't spill even if the battery is tipped upside down.

Specially designed anti-explosion filter and safety valves prevent gas leakage when overcharged.




Standard

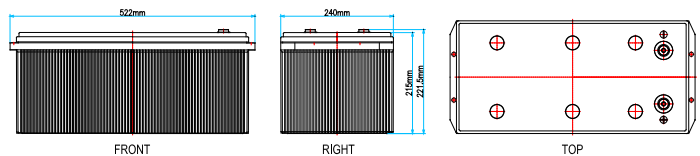


M1-03

Battery model	SG 1500H (12V150AH / 20 HOUR RATE)			
Capacity (@25°C)	C <sub>20</sub> (1.80VPC)	C <sub>10</sub> (1.75VPC)	C <sub>5</sub> (1.70VPC)	C <sub>1</sub> (1.60VPC)
	150Ah	143Ah	131Ah	99Ah
Dimensions (mm/inch)	Length	Width	Height	Total Height
	522(20.55)	240(9.45)	215(8.47)	221(8.70)
Weight (kg/lbs)	44.2kg(97.44lbs) ± 3%			
Internal resistance (mΩ)	≤3.10mΩ (25°C, 77°F)			
Max. discharge current (5sec)	1140 A	Max. discharge current(continuous)		430 A
Capacity affected by Temperature	@30°C (86°F)	@25°C (77°F)	@10°C (50°F)	@-10°C (14°F)
	105%	103%	95%	78%
Self discharge (@25°C, 77°F)	After 1 month 3%		After 3 month 8%	After 6 month 15%
Max. short duration discharge current (0.1sec)	2,860A ± 10%			
Recommended charging (@25°C) Solar system	1 <sup>st</sup> Bulk step	2 <sup>nd</sup> Absorption step		3 <sup>rd</sup> Floating step
	0.20~0.25C CC	2.40V/cell CV, (cut-off A : 0.005C)		2.28V/cell CV


**Cycle life characteristics**

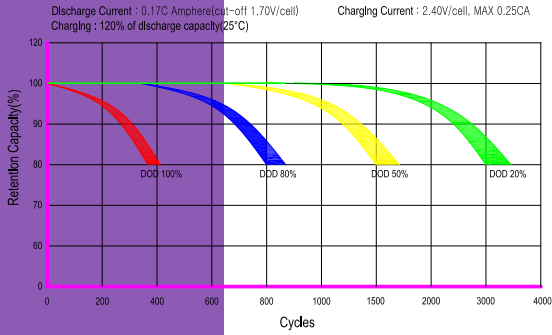


**Solar charging characteristics**

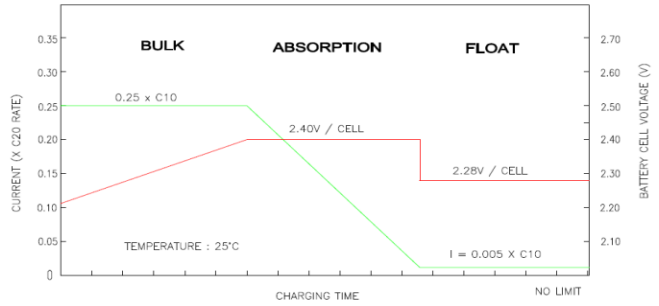


**Discharge time vs current**

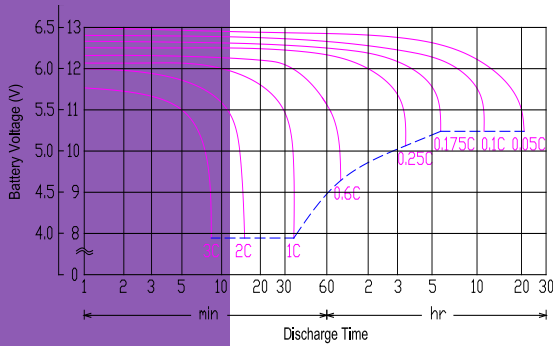


**Charge voltage and Temperature**

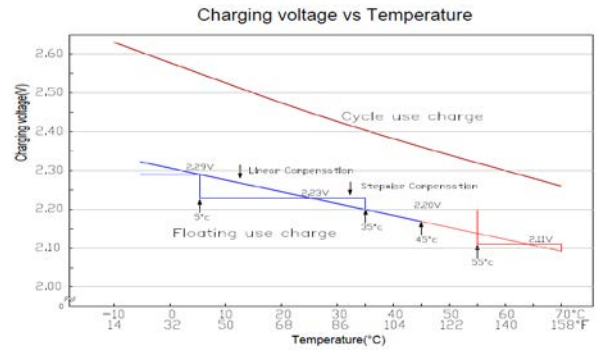

**Effect of temperature on capacity**

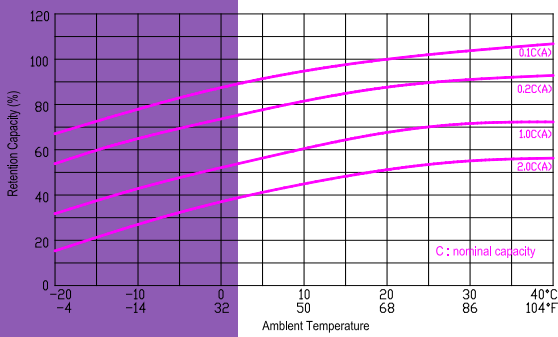

**Self discharge**

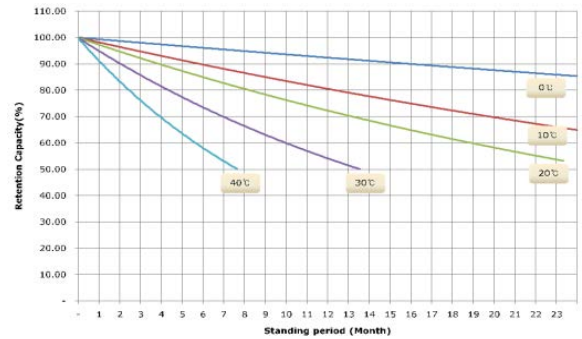

**Constant current discharge ratings – Amperes per cell @ 25°C**

V/cell	Minutes						Hours					
	5	10	15	20	30	40	1	3	5	8	10	20
1.90V	283	235	219	178	146.9	124	94	35.1	23.0	15.2	13.2	7.0
1.85V	337	259	252	204	163	139	96	36.5	23.9	15.9	13.8	7.2
1.80V	392	309	271	216	168	143	97	38.0	24.5	16.4	14.3	7.5
1.75V	423	326	281	222	171	147	97	39.4	25.2	16.8	14.5	7.6
1.70V	457	342	292	227	173	149	98	40.1	26.5	17.4	15.1	7.9
1.65V	471	350	296	231	175	149	98	41.5	27.0	18.1	15.7	8.2
1.60V	484	357	298	232	176	149	99	42.2	27.8	18.5	16.1	8.5

**Constant power discharge ratings – Watts per cell @ 25°C**

V/cell	Minutes						Hours					
	5	10	15	20	30	40	1	3	5	8	10	20
1.90V	548	455	425	345	289	245	184	69	45	30	26	14
1.85V	653	503	488	395	322	273	189	72	47	32	28	14
1.80V	761	599	525	419	330	282	190	75	48	33	28	15
1.75V	821	633	546	431	338	290	192	78	50	34	29	15
1.70V	886	664	566	440	342	293	193	79	52	35	30	16
1.65V	914	678	574	448	345	293	193	82	53	36	31	16
1.60V	940	693	578	451	346	294	195	83	55	37	32	17

